



## Long Sensing Distance Type Proximity Sensor

### ■ Features


- Sensing up to as 50mm
- Improved the noise resistance with dedicated IC
- Built-in reverse polarity protection circuit, surge protection circuit, overcurrent protection circuit
- Wide range of power supply : 12-48VDC (Voltage range : 10-65VDC)
- Simultaneous output of Normal Open+Normal Close
- Built-in power indicator and operation indicator
- Protection structure IP67 (IEC standard)




 Please read "Caution for your safety" in operation manual before using. 

### ■ Type

#### ◎ DC 4-wire long distance type

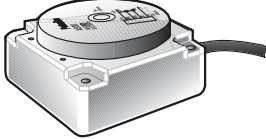Appearance	Model
	<b>AS80-50DN3</b>
	<b>AS80-50DP3</b>

### ■ Specification

Model	AS80-50DN3	AS80-50DP3
Sensing type	NPN Normally Open + Normally Closed	PNP Normally Open + Normally Closed
Sensing distance	50mm	
Hysteresis	Max. 15% of sensing distance	
Standard sensing target	150×150×1mm (Iron)	
Setting distance	0 to 35mm	
Power supply (Operating voltage)	12-48VDC (10-65VDC)	
Current consumption	Max. 20mA	
Response frequency*1	30Hz	
Residual voltage	Max. 2V	
Affection by Temp.	Max. ±10% for sensing distance at ambient temperature 20°C	
Control output	Max. 200mA	
Insulation resistance	Min. 50MΩ (at 500VDC megger)	
Dielectric strength	1,500VAC 50/60Hz for 1 minute	
Vibration	1mm amplitude at frequency of 10 to 55Hz (for 1 min.) in each X, Y, Z direction for 2 hours	
Shock	500m/s <sup>2</sup> (approx. 50G) in X, Y, Z direction for 3 times	
Indicator	Power indicator: green LED, Operation indicator: yellow LED	
Environment	Ambient temperature	-25 to 70°C, storage: -30 to 80°C
	Ambient humidity	35 to 95%RH, storage: 35 to 95%RH
Protection circuit	Surge protection circuit, Reverse polarity protection circuit, Overcurrent protection circuit	
Cable	Ø5mm, 4-wire, 2m (AWG22, Core diameter: 0.08mm, Number of cores: 60, Insulator diameter: Ø1.25mm)	
Approval		
Protection structure	IP67 (IEC standard)	
Unit weight	Approx. 470g	


\*1: The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.

※Environment resistance is rated at no freezing or condensation.

# Long Sensing Distance Type

## Dimensions

(unit: mm)

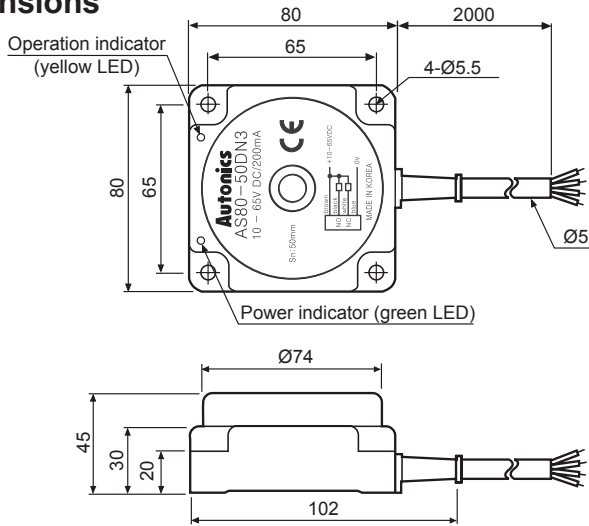


## Control Output Diagram

NPN (N.O.+N.C.)		Sensing target Presence N.O. None Operation indicator (yellow LED) ON OFF Load (brown-black) Operation Return Output voltage (black-blue) H L	Sensing target Presence N.C. None Operation indicator (yellow LED) ON OFF Load (brown-white) Operation Return Output voltage (white-blue) H L		
				PNP (N.O.+N.C.)	

## Mutual-Interference & Influence By Surrounding Metals


### © Mutual-interference

When several proximity sensors are mounted close to one another a malfunction of the sensor may be caused due to mutual interference. Therefore, be sure to provide a minimum distance between the two sensors as below chart indicates.

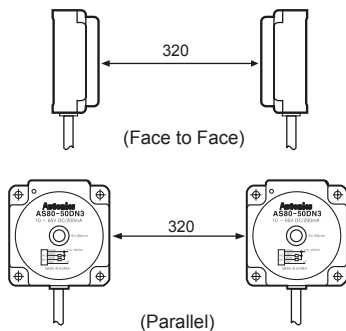

### © Influence by surrounding metals

When sensors are mounted on metallic panel, you must prevent the sensors from being affected by any metallic object except target. Therefore, be sure to provide a minimum distance as below chart indicates.

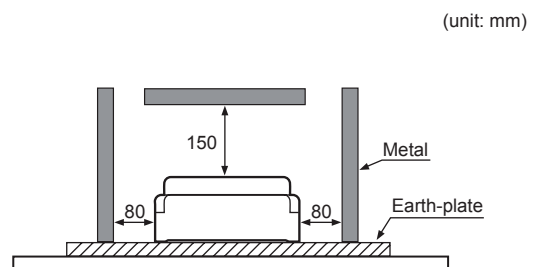

(A)	Photoelectric Sensors
(B)	Fiber Optic Sensors
(C)	Door/Area Sensors
(D)	Proximity Sensors
(E)	Pressure Sensors
(F)	Rotary Encoders
(G)	Connectors/ Sockets
(H)	Temperature Controllers
(I)	SSRs / Power Controllers
(J)	Counters
(K)	Timers
(L)	Panel Meters
(M)	Tacho / Speed / Pulse Meters
(N)	Display Units
(O)	Sensor Controllers
(P)	Switching Mode Power Supplies
(Q)	Stepper Motors & Drivers & Controllers
(R)	Graphic/ Logic Panels
(S)	Field Network Devices
(T)	Software